

Dispense Heads with Turncock

U.S. Patents 6,357,494; 9,580,197



For higher flow rate with two turncock's combines the dispensing and recirculation into one head, through one dip tube.

- High volume liquid supply up to 15gpm
- Head can be used in both flow directions for filling or dispensing of liquids

Features:

- Manual shut-off for liquid flow with turncock
- No restrictions for liquid flow stream avoiding turbulence
- Operator has no contact with the chemical-no dripping
- Chemical key coding – all parts are in the dry area

Construction Material:

- Standard – PE
- optional – PVDF
- Conductive – PTFE/PP
- O-Rings - Kalrez®



Technical Specifications:

- Size: 3" dia. x 8 1/2" height
- Height above top of container: 4"
- Weight: 1lb.
- Connections - Flare
- Liquid connection – 1/2" or 3/4"
- Gas connection – 1/4" or 3/8"

Other sizes and connection types (e.g. threads or clamps) on request

Order no. DH-AK-PE-XXX-FX/X-F1/4"

Dimensions:

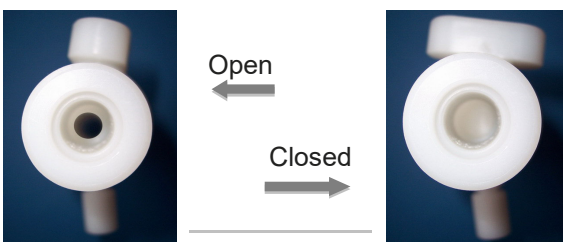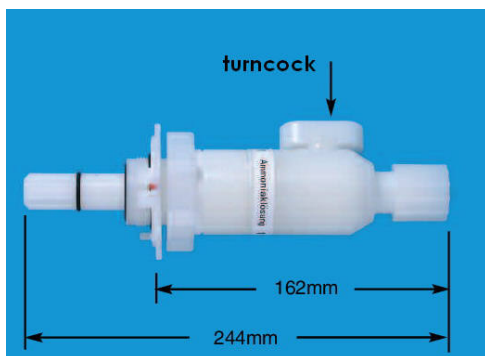

AS Strömungstechnik GmbH | elly-beinhorn-str. 7 | 73760 ostfildern | germany
tel.. +49 (0) 711 220548-0 | fax: +49 (0) 711 220548-29 | e-mail: info@asstroemungstechnik.de
www.asstroemungstechnik.de | DIN-certified ISO 9001:2015 | district court stuttgart HRB 224744
managing director: andreas szeteli, michael szeteli, thomas raifßer

